
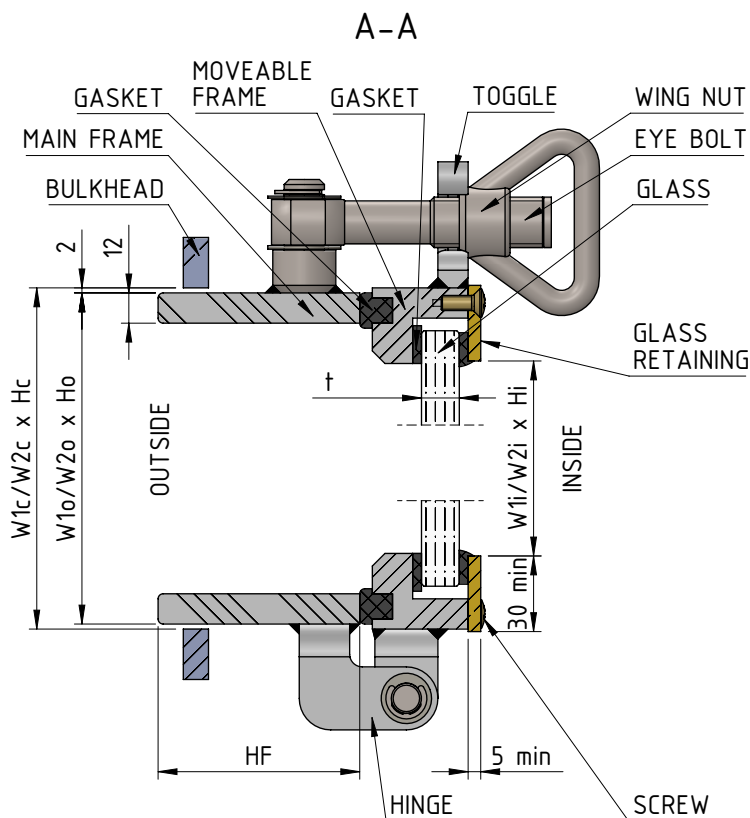


DOWN INWARD OPENING WINDOW FOR WELDING, TRAPEZOID

model: W-IDW-F-TR

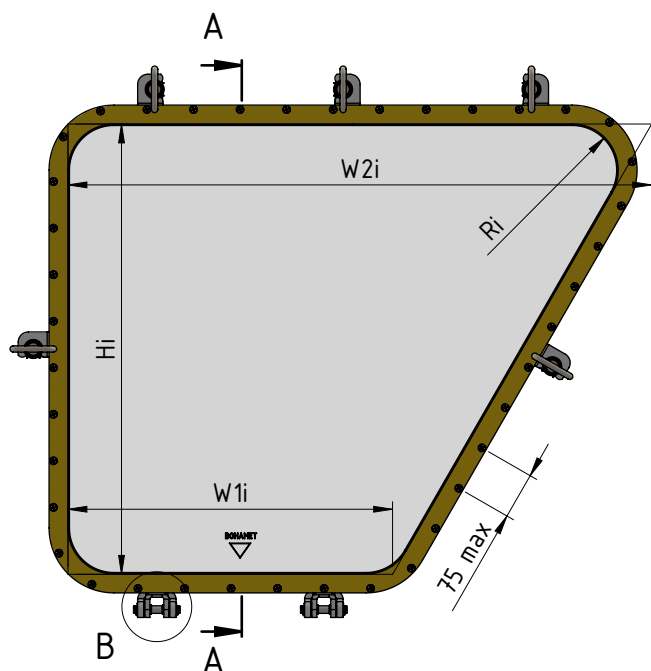

MATERIALS CONFIGURATION

MAIN FRAME	MOVEABLE FRAME				GLASS RETAINING		SCREWS	
	1	2	3	4	2	4*	2	4*
1	X	X	X	X	X	X	X	X
2	X	X	X	X	X	X	X	X
3	X	X	X	X	X	X	X	X
4	X	X	X	X	X	X	X	X

Not available for the aluminum moveable frame

- | | |
|------------------------------------|--|
| 1. Steel (acc. to PN-EN10025): | S235JR; S355J2; A36; D36; E36 |
| 2. St. steel (acc. to PN-EN10088): | 1.4306 (304L); 1.4404 (316L); 1.4457 (316Ti) |
| 3. Alu. alloy (acc. to PN-EN755): | EN-AW 5754; EN-AW 5083; EN-AW 6063; EN-AW 6060 |
| 4. Brass (acc. to PN-EN12167): | CuZn37 |

Typical radius Ro: R75, R100, R125

Available glass: single glass; laminated glass; tinted glass; heated glass; double glazed; triple glazed


Available single glass thicknesses: 6; 8; 10; 12; 15; 19; 25

Available accessories for windows: S; D; R; W; C; G; H - see accessories TDS



For fireproof unit see separate TDS

Hinge configurations:


Detail B1
Hinge $\varnothing 12$



Detail B2
Hinge $\varnothing 16$

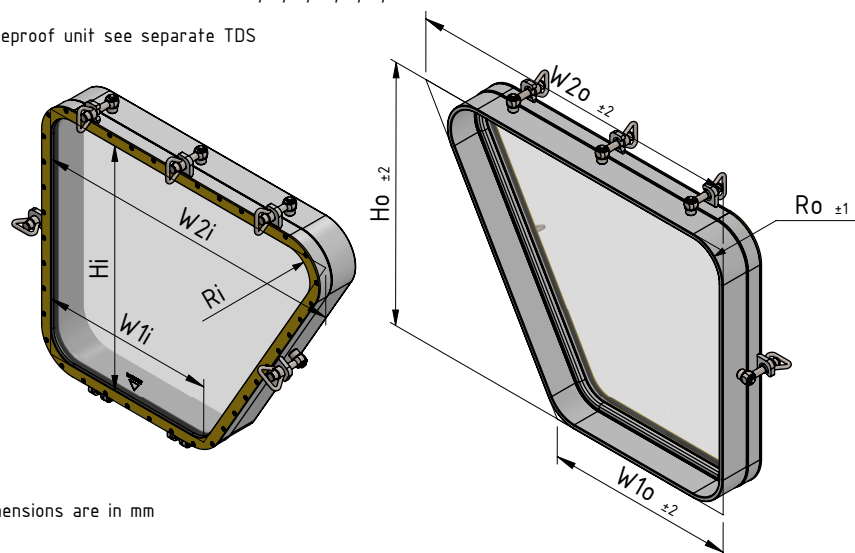

CUT-OUT
HOLE IN PLATE (HIP)

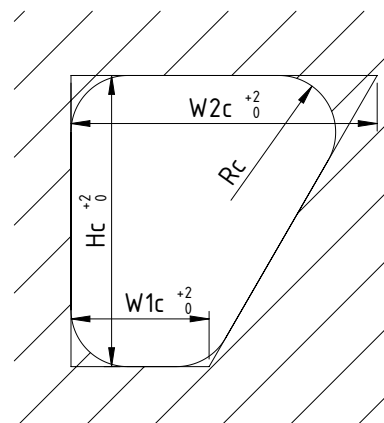

All dimensions are in mm

BOHAMET

marketing@bohament.pl
design.office@bohament.pl
www.bohamet.com